


### Cross Section



### Close-up

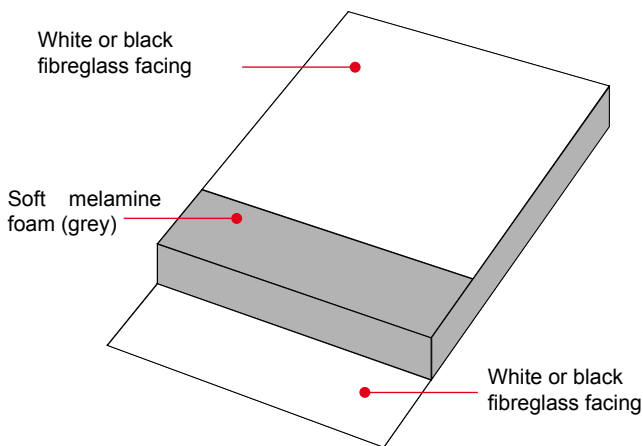

### Applications

- Machinery jacketing
- Motor vehicles
- Machinery
- Wall and ceiling covering

### Attributes

Dinaphon® B 802 absorption panels have excellent absorption properties and are highly resistant to many chemical substances.

### Application

Substrates must be dry, oil-free and dust-free when the panels are stuck to the surface. Full surface contact is necessary as is a temperature of at least 18° C for the installation to achieve satisfactory results.

### Storage

Store in a dry area at temperatures ranging between 15 - 25° C.

### Technical Data

Product Data	Dinaphon® B 802
Bulk density of foam	8.5 – 11.5 kg/m <sup>3</sup>
Thermal stability of foam:	- 60 to + 150 °C
Building material rating of foam as per DIN 4102	B1
BKZ (Swiss fire code rating)	5.3
Rated thermal conductivity $\lambda$ (W/m <sup>2</sup> K)	0.035

### Packaging Unit and Form

**Panel size:** 1200 x 600 mm

**Panel thickness:** 10, 20, 30, 40, 50 mm

**Product variant designations:**

B 802/10, B 802/20, B 802/30, B 802/40, B 802/50  
50 in white (W) or black (S), e.g. B 802/10S

### Cut to order panels:

Keller will be glad to cut panels to specific size requirements indicated in customer plans or drawing files for both small and large orders. Ask for a price quote.



### Sound Absorption

**Dinaphon® B 802** installed directly on the floor. Results obtained using the reverberant field testing method for:

	10 mm	20 mm	30 mm	40 mm	50 mm
	—●—	—▲—	—■—	—◆—	— —
100 Hz	0.03	0.05	0.07	0.08	0.10
125 Hz	0.03	0.06	0.08	0.11	0.14
160 Hz	0.07	0.11	0.16	0.20	0.27
200 Hz	0.06	0.13	0.20	0.26	0.36
250 Hz	0.10	0.20	0.30	0.40	0.47
315 Hz	0.11	0.25	0.34	0.54	0.67
400 Hz	0.17	0.36	0.56	0.75	0.86
500 Hz	0.22	0.49	0.68	0.87	0.94
630 Hz	0.30	0.62	0.83	0.94	0.99
800 Hz	0.43	0.74	0.90	0.95	1.00
1000 Hz	0.51	0.86	0.92	1.00	1.01
1250 Hz	0.58	0.87	0.95	0.97	0.96
1600 Hz	0.61	0.86	0.89	0.96	1.01
2000 Hz	0.67	0.92	0.91	0.98	0.99
2500 Hz	0.71	0.94	0.91	0.96	1.00
3150 Hz	0.68	0.85	0.83	0.86	0.93
4000 Hz	0.63	0.71	0.72	0.80	0.87
5000 Hz	0.48	0.62	0.52	0.68	0.73

**Dinaphon® B 802/30** installed in suspended frame. Results obtained using the reverberant field testing method:

Distance from ceiling	300 mm
100 Hz	0.21
125 Hz	0.33
160 Hz	0.58
200 Hz	0.65
250 Hz	0.75
315 Hz	0.90
400 Hz	0.85
500 Hz	0.79
630 Hz	0.74
800 Hz	0.91
1000 Hz	0.92
1250 Hz	0.95
1600 Hz	0.95
2000 Hz	0.96
2500 Hz	0.97
3150 Hz	0.98
4000 Hz	0.99
5000 Hz	1.00

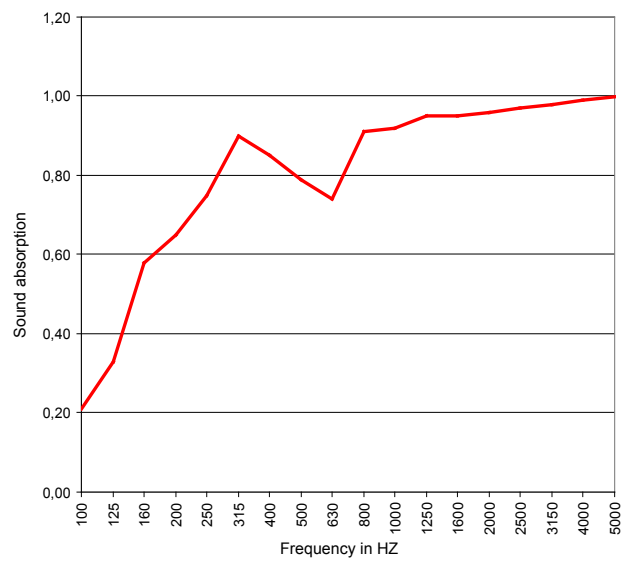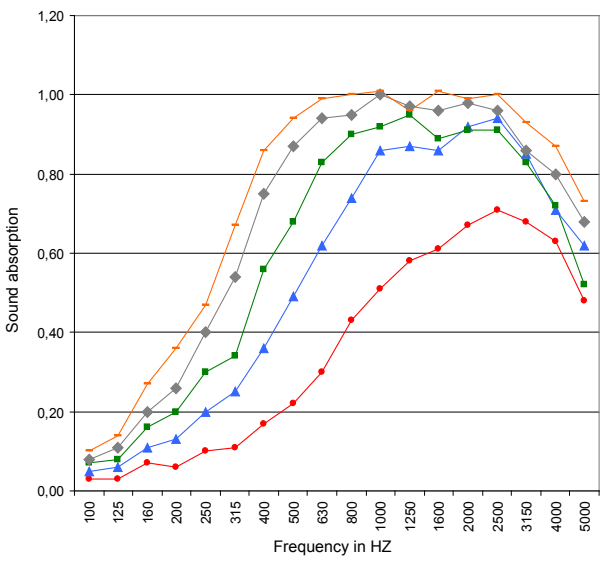

*Keller Lärmschutz AG provides its assistance, application-specific advice and product use instructions to the best of its knowledge and ability. Keller Lärmschutz AG reserves the right to make the changes to its products and information, which are the result of its constant efforts to improve both the information and products, and shall not be held liable for damages occurring due to the*

*information or assistance it provides. Moreover, the information provided by Keller Lärmschutz AG shall not nullify the responsibility of the purchaser of the products to test the suitability of the materials for the intended application, process and purpose prior to using them.*